

Chubb safes 3 1/2" Strongroom Doors are specially designed to meet the demands for a high security installation. Constructed to resist against modern cutting tools such as high speed drills, force and fire.



3 1/2" Strongroom Door

Burglar Resistant

Features

- Door** - Solid door slab with a protective thickness of 89mm (3 1/2") forms the basis of the door which has an overall thickness of 226mm. Filled with a specially formulated F80 barrier material reinforced with steel fibers provides resistant to high speed drilling, oxy-acetylene cuttings and jack attacks.
- Boltwork** - Secured by a 7 active front bolts, 2 active top bolts, 2 active bottom bolts and 7 passive back bolts. Each bolt has a diameter of 50mm.
- Locking** - Secured with a single 3-wheel Keyless Combination Lock capable of 1,000,000 change codes and a 8-lever double bitted Key Lock as standard. Both Locks operated independently of each other.
- Relocker** - Glass Relockers protect both the Keyless Combination Lock and Key Lock in the door. Any forced attempts to dislodge the locks would activate both relockers. This restricts the movement of the internal boltwork system. Relockers are further protected by Chubb safes patented Torch and Drill Resistant (TDR) material.
- Frame** - The "wrapped around the wall" door frame is fabricated from steel sections, bent to form a single structure. Vestibule side frames at full height of the door are attached to the frame and grip the inside of the wall. This design provides stronger resistance against attacks to the door.
- Emergency Ventilator** - An emergency ventilator is integrated into the door frame to provide fresh air, allow two way conversation and to supply food or water to anyone trapped in the strongroom.
- Lighting Control** - A relay micro switch is fitted to the door to control the electric lighting in the room and to ensure that when the door is closed, all lighting within the room is switched off.
- Alarm Micro Switch** - A relay micro switch is fitted to the door for possible connection to the main intruder alarm system as an additional protection.




Chubb safes
Trusted the world over.

BURGLAR
RESISTANT

Product Specifications

Model	External Dimensions (mm)	Clear Opening (mm)	Wall Opening (mm)	Wall Thickness (mm)	Approx. Nett Weight (Kg)
3 1/2"	2110 (H) x 1312 (W)	1920 (H) x 814 (W)	2100 (H) x 1200 (W)	300 (standard)	740 (Door) and 40 (Gate)

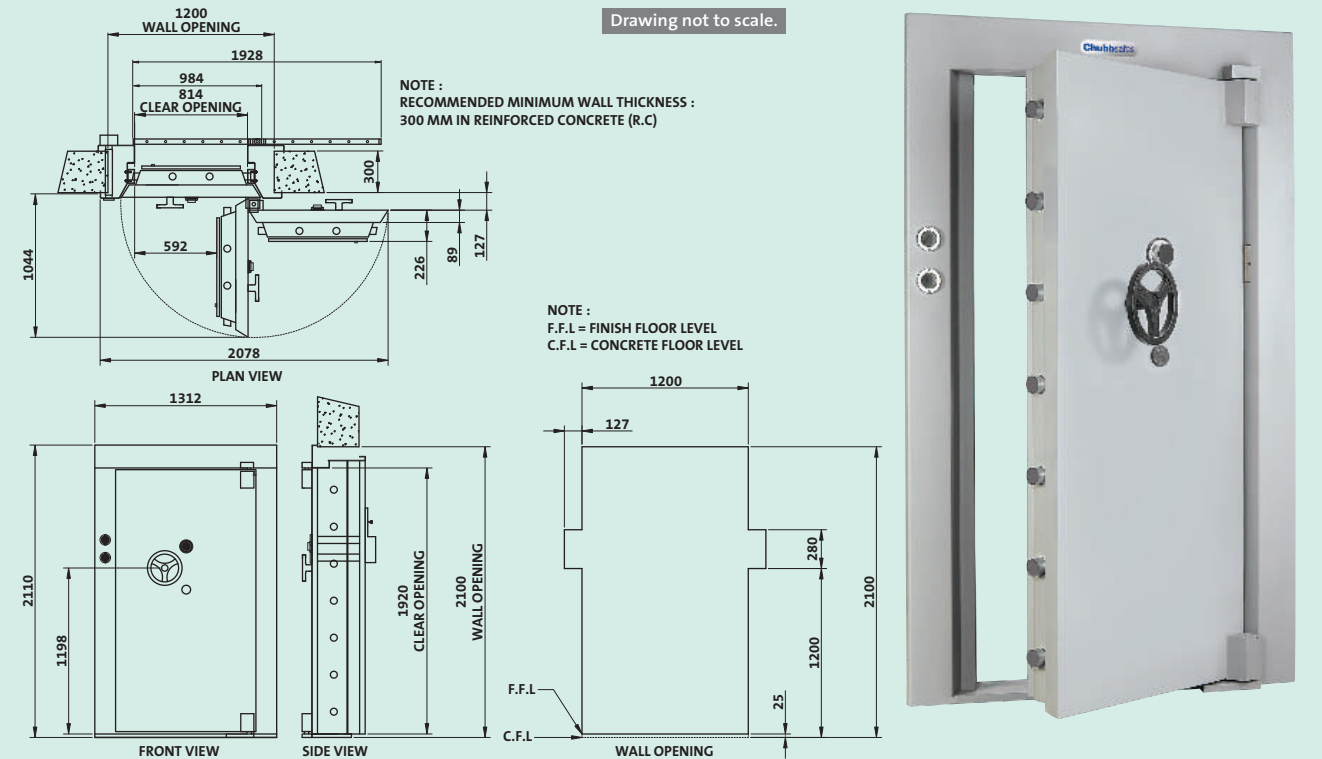

Options :

- Grille Gate** - An Optional Grille Gate can be fitted to the door for ventilation during the day or as control when the door is open. The Grille Gate is secured by two high security 5-lever Mortice Deadlocks.
- Finish** - The door comes standard with a painted grey primer finish with an option for a stainless steel clad finish.
- Locks** - A Dial Check Lock and Blinder Shield can be fitted as an option to the combination lock. Two or three movement Timelocks or electronic combination lock are also available. A 4-wheel Keyless Combination Lock can be fitted to replace the 3-wheel Keyless Combination Lock as an option.
- Protective Material** - Instead of the Chubb safes F80 barrier material, the burglary resistance of the door can be further enhanced by replacing it with the Chubb safes FXP260 specially formulated barrier material.



Emergency ventilator



Heavy cylindrical moving bolts



Secured by a High Security 3-wheel Keyless Combination Lock certificated under UL Group 2, VdS Class 1, Cen A, A2P A.



Secured by a 8-lever double bitted Key Lock c/w detachable key bit certificated under EN 1300 A, ECB-S, CNNP a2p(E) Niveau A, VdS class 1, GOST class B, IMP class A, UL 437.

When ordering, please state :

- Wall thickness.
- Type of wall e.g. brick, R.C. etc.
- Hung of door required.
- If to be installed in multi-storey building, state floor level.
- Path of access to where door is to be installed.
- If A/C supply available for Ventilator/Lighting.

Note :

- Chubb safes Doors are designed primarily against physical attack, but for recommended storage of paper documents and computer media, ask for details of Chubb safes Fire Resistant Protection Cabinet or Chubb safes Data Cabinets.
- Chubb safes policy is one of constant improvement. We reserve the right to alter any specification contained in this publication without prior notification. Variance \pm 5mm.

Authorised dealer :

Catalogue Reference No : 6/06/1

Chubb safes

Trusted the world over.

Chubb Malaysia Sdn Bhd (7652-K)
Kompleks Sime Darby, Persiaran Kewajipan,
USJ 7, 47600 UEP Subang Jaya,
Selangor Darul Ehsan, Malaysia.
Tel : +603-5635 3050 Fax : +603-5635 3066
Website : www.chubbmalaysia.com

'Chubb' is a registered trademark owned by Chubb plc and is used under license.

A member of the Sime Darby Group



MS ISO 9001:2000
Registration No : AR 0238